


MetFloor® 60 has exceptional spanning capabilities and reduced concrete usage. The result – a highly cost-effective, attractive, and easy-to-install floor solution. This highly developed product has been created with over 30 years experience in the composite metal flooring market.







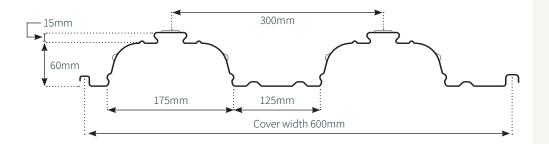



- Available in 0.9mm, 1.0mm and 1.2mm gauges
- Enhanced profile with trough ribs, shear keys and joining laps
- Greater span capability for improved sustainability and reduced costs
- Unpropped decking spans in excess of 4.5m can be achieved
- Complete fire design available from MetFloor software for ratings up to 2 hours
- Available with crushed ends, MetFloor 60 gives exceptional fire protection
- Ideal for multi-rise construction & mezzanine floors due to speed of installation, the reduced transport costs and by providing working platforms during construction

Nominal thickness (mm)	Steel Grades (N/mm²)	Profile depth (mm)	Height of neutral axis (mm)	Profile area (mm²)	Profile weight (kN/m²)
0.9	S350 / S450	60	30	1269	0.103
1	S350 / S450	60	30	1416	0.114
1.2	S350 / S450	60	30	1711	0.137

Slab depth (mm) Concrete volume (m³/m²) Weight of concrete (kN/m²) Normal weight of concrete 130 0.095 2.26 2.22 140 0.106 2.50 2.45 150 0.116 2.73 2.68 160 0.126 2.97 2.92 170 0.136 3.20 3.15 180 0.146 3.44 3.38 190 0.156 3.67 3.61 200 0.166 3.91 3.83	METFLOOR 60 COMPOSITE SLAB – VOLUME & WEIGHT						
130 0.095 2.26 2.22 140 0.106 2.50 2.45 150 0.116 2.73 2.68 160 0.126 2.97 2.92 170 0.136 3.20 3.15 180 0.146 3.44 3.38 190 0.156 3.67 3.61		volume					
140 0.106 2.50 2.45 150 0.116 2.73 2.68 160 0.126 2.97 2.92 170 0.136 3.20 3.15 180 0.146 3.44 3.38 190 0.156 3.67 3.61	(11111)		Wet	Dry			
150 0.116 2.73 2.68 160 0.126 2.97 2.92 170 0.136 3.20 3.15 180 0.146 3.44 3.38 190 0.156 3.67 3.61	130	0.095	2.26	2.22			
160 0.126 2.97 2.92 170 0.136 3.20 3.15 180 0.146 3.44 3.38 190 0.156 3.67 3.61	140	0.106	2.50	2.45			
170 0.136 3.20 3.15 180 0.146 3.44 3.38 190 0.156 3.67 3.61	150	0.116	2.73	2.68			
180 0.146 3.44 3.38 190 0.156 3.67 3.61	160	0.126	2.97	2.92			
190 0.156 3.67 3.61	170	0.136	3.20	3.15			
	180	0.146	3.44	3.38			
200 0.166 3.91 3.83	190	0.156	3.67	3.61			
	200	0.166	3.91	3.83			
250 0.216 5.08 4.98	250	0.216	5.08	4.98			

For further information please contact SWUK:

Oct 2018; v1.0



SWUK Steel Decking Supplies Ltd Unit 2, 21 Moor Farm Road West, Airfield Industrial Estate, Ashbourne, Derbyshire, DE6 1HD. Customer services: 01335 347629 Sales enquiries: 01335 347629 Technical support: 01335 347629